

青铜直柱型

内径 F7 外径 m6/ 内径 E7 外径 r6



大批量
订购
bulk order

库存产品


■ 内径 F7 外径 m6/ 内径 E7 外径 r6



① 代号	类型	④ 材质	内径公差	外径公差	硬度 HB	使用温度范围 (°C)
OFBBZ	直柱型	特殊锡青铜	F7	m6	≥60	-40~150
OFBBR			E7	r6		

产品特点: 可实现微小的运行, 耐烧蚀性优异, 适用于中高速场合。

- ▲根据 ④ 材质特性, 建议在定期润滑条件下使用。
- ▲配套轴公差参考: f8 或 g6。
- ▲基座孔推荐公差: H7。

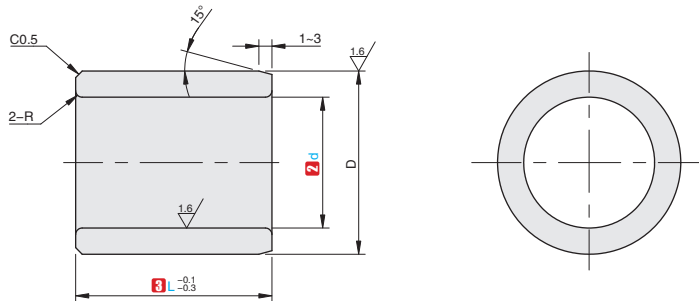

订购编号示例

① 代号 - ② d - ③ L
OFBBZ - d10 - L25

型号		Dm6		③ L						R	基座孔尺寸	推荐公差 H7	
① 代号	② d _{F7}			8	10	12	15	20					
OFBBZ	5	+0.022	9	+0.015	8	10	12	15	20	0.5	9	+0.015	
	6	+0.010	10	+0.006	8	10	12	15	20		25	10	0
	8	+0.028	12	+0.018	8	10	12	15	20		25	12	+0.018
	10	+0.013	14		8	10	12	15	20		25	30	
	12	+0.034	18	+0.007	10 12 15 20 25 30						1	18	+0.021
	13		19		10 12 15 20 25 30 40	19							
	15	+0.016	21	+0.021	10 12 15 20 25 30 40 50	21	+0.021						
	16	22	+0.008	10 12 15 20 25 30 40 50	22								
	20	+0.041	28	+0.025	15 20 25 30 40 50						1.5	28	+0.025
	25		33		15 20 25 30 40 50 60	33							
	30		+0.020		38	+0.009	20 25 30 40 50 60						

型号		Dr6		③ L						R	基座孔尺寸	推荐公差 H7	
① 代号	② d _{E7}			8	10	12	15	20	25				
OFBBR	5	+0.032	9	+0.028	8	10	12	15	20	25	0.5	9	+0.015
	6	+0.020	10	+0.019	8	10	12	15	20	25		10	0
	8	+0.040	12	+0.034	8	10	12	15	20	25		12	+0.018
	10	+0.025	14		+0.023	8	10	12	15	20		25	
	12	+0.050	18	+0.028	10 12 15 20 25 30						1	18	+0.021
	13		19		10 12 15 20 25 30	19							
	15	+0.032	21	+0.041	10 12 15 20 25 30 40	21	+0.021						
	16	22	+0.028	10 12 15 20 25 30 40 50	22								
	20	+0.061	28	+0.050	12 15 20 25 30 40 50 60						1.5	28	+0.025
	25		33		15 20 25 30 40 50 60	33							
	30		+0.040		38	+0.034	20 25 30 40 50 60						

B2 无油衬套



交货期
5 工作日



1-9 10~
100% 现询