


★ 产品特点：底部橡胶带防滑槽，防滑、防震性能优异。



①代号 - ②底径 - ③螺纹直径 - ④螺纹长度
 SFFBZLL - D60 - M12 - L70


①代号	主要尺寸							承载(kg)	参考重量(kg/pcs)			
	②D	③M	④L	E	H	B	F					
钢 SFFBZLL 不锈钢 SFFSLL	40	M8	50	14	22		6	450	0.16			
			75						0.17			
			100						0.18			
		M12	125						19	24	10	0.19
			50									0.20
			75									0.21
	60	M12	100	19	33	25	13	700	0.22			
			125						0.23			
			150						0.25			
		M16	70						24	35	16	0.25
			100									0.30
			130									0.31
80	M16	100	24	40	30	13	850	0.35				
		125						0.36				
		150						0.55				
		M20						75	30	43	16	0.57
								100				0.59
								125				0.61
	100	M16	150	24	45	35	16	900	0.62			
			70						0.64			
			100						0.66			
		M20	100						30	48	19	0.68
			125									0.90
			150									0.92
120	M20	100	30	43	40	16	1000	1.10				
		125						1.17				
		150						1.63				
	M24	75						36	46	40	1.68	
		100									1.74	
		125									1.8	
		150						1.68				
		200						1.78				
								1.88				
								1.91				

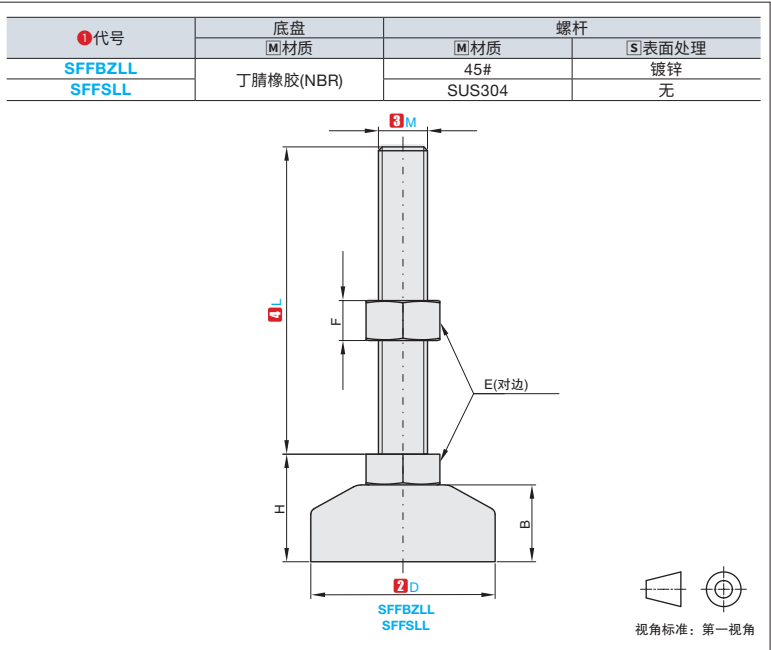

数量分类	小单	中大单	大单
数量	1-50	51-100	101~
交货期	通常	7 工作日	现询



数量	1-9	10~
价格	100%	另行报价



▲ 承载与参考重量仅供参考。