


# DL5

## SOLENOID OPERATED DIRECTIONAL VALVE COMPACT VERSION SERIES 10


### SUBPLATE MOUNTING ISO 4401-05

**p** max 320 bar  
**Q** max 125 l/min

### MOUNTING INTERFACE

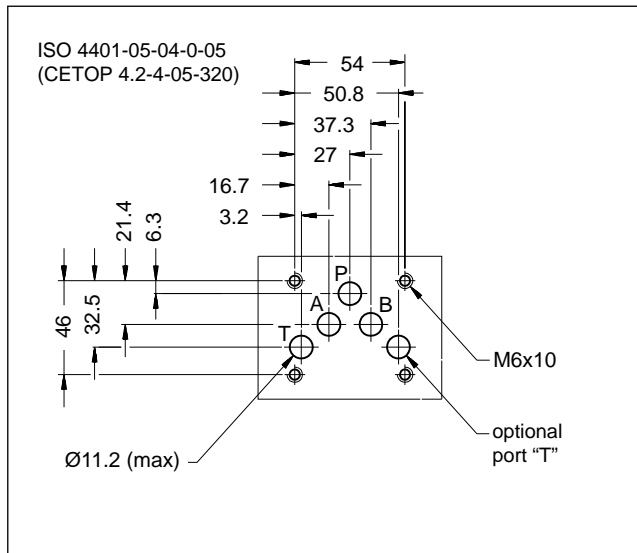

### OPERATING PRINCIPLE

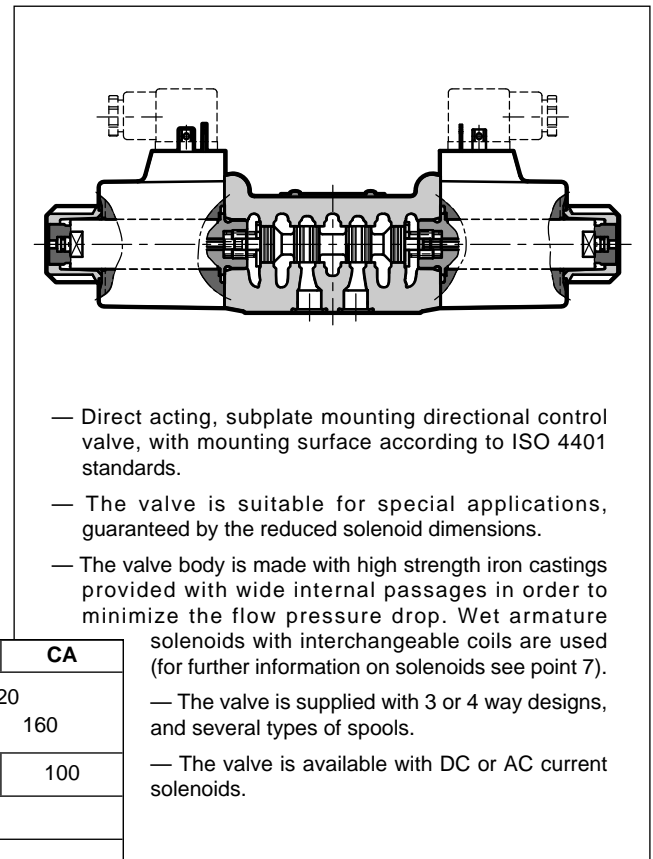


### PERFORMANCES

(with mineral oil of viscosity of 36 cSt at 50°C)

Maximum operating pressure: - ports P - A - B - port T	bar	CC	CA
		210	160
Maximum flow rate	l/min	125	100
Pressure drop $\Delta p-Q$	see point 4		
Operating limits	see point 5		
Electrical features	see point 7		
Electrical connections	EN 175301-803 (ex DIN 43650)		
Ambient temperature range	°C	-20 / +50	
Fluid temperature range	°C	-20 / +80	
Fluid viscosity range	cSt	10 ÷ 400	
Fluid contamination degree	according to ISO 4406:1999 class 20/18/15		
Recommended viscosity	cSt	25	
Masse: single solenoid valve double solenoid valve	kg	2,8	3,7

### 1 - IDENTIFICATION CODE

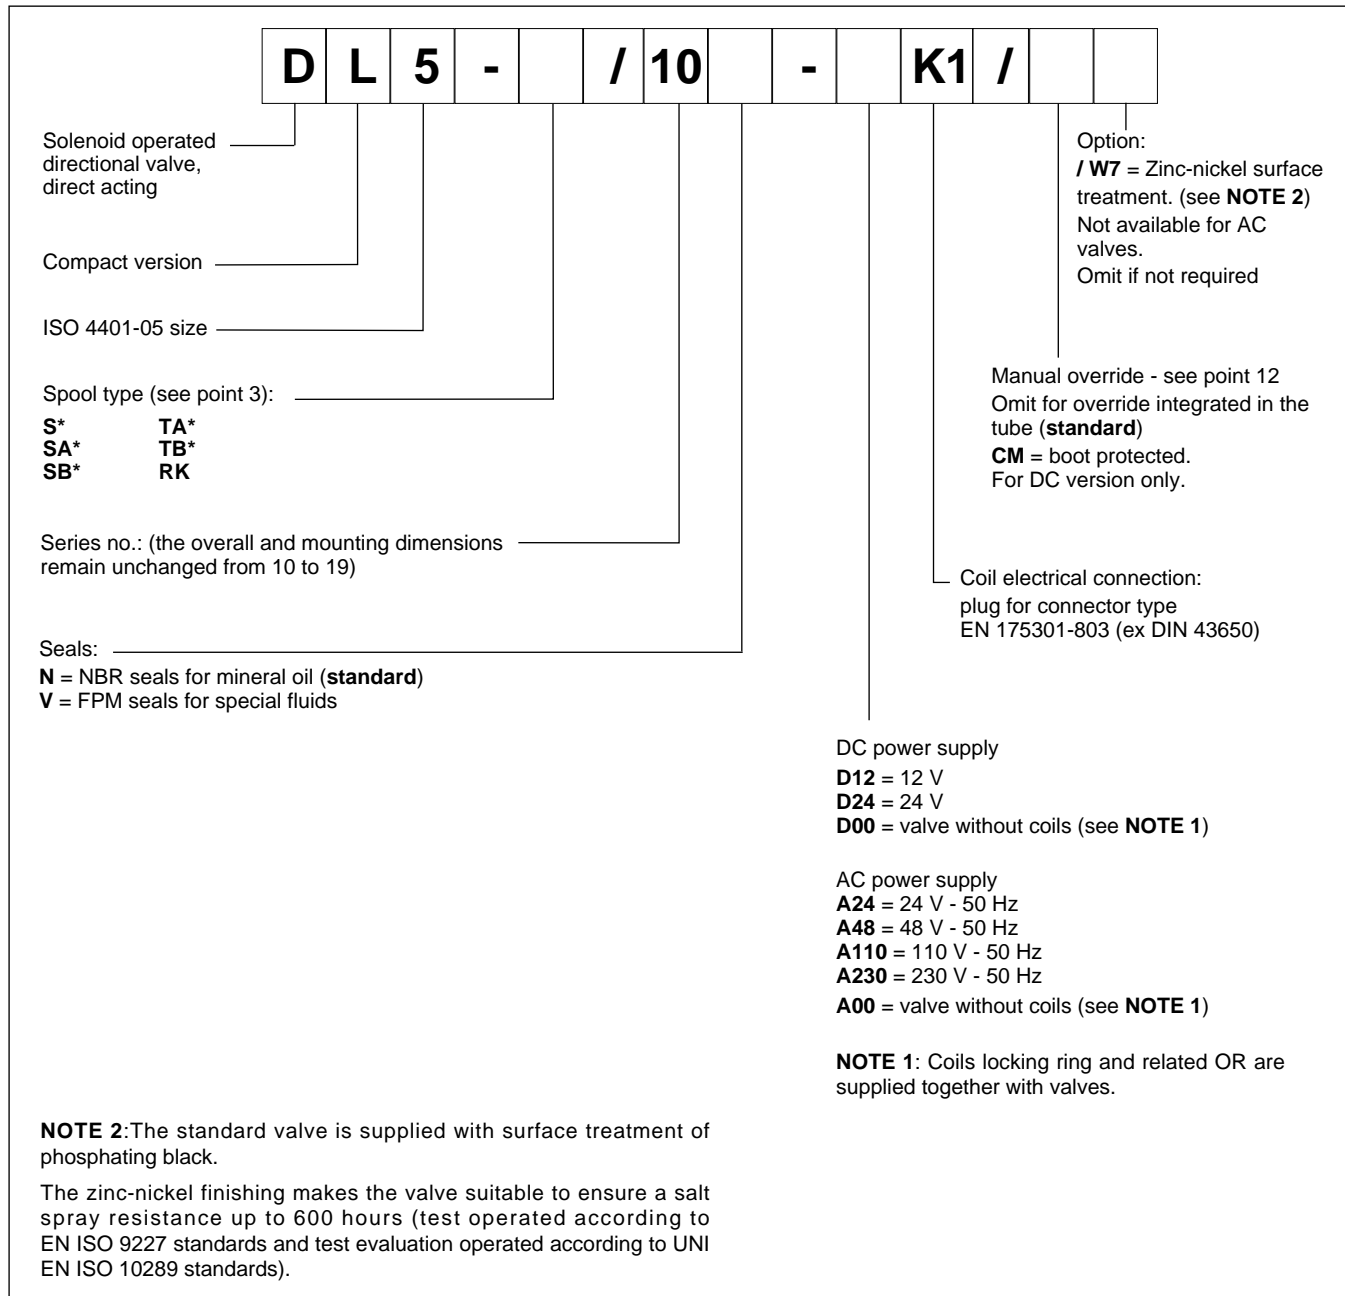


### 2 - HYDRAULIC FLUIDS


Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code N). For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other fluid types such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

### 3 - SPOOL TYPE


**Type S\*:**  
2 solenoids - 3 positions  
with spring centreing




**Type SA\*:**  
1 solenoid side A  
2 positions (central + external)  
with spring return




**Type SB\*:**  
1 solenoid side B  
2 positions (central + external)  
with spring return




**Type RK:**  
2 solenoids - 2 positions  
with mechanical retention



**Type TA:**  
1 solenoid side A  
2 external positions  
with spring return




**Type TB:**  
1 solenoid side B  
2 external positions  
with spring return



**NOTE:** Others spools available on request only.

### 4 - PRESSURE DROPS $\Delta p$ -Q

(obtained with viscosity of 36 cSt at 50 °C)

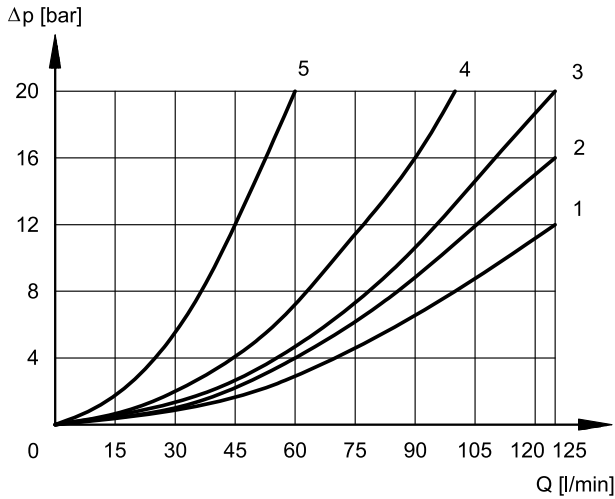

#### ENERGIZED VALVE

SPOOL	FLOW DIRECTIONS			
	P→A	P→B	A→T	B→T
	CURVES ON GRAPHS			
S1	1	1	2	2
S2	1	1	1	1
S3	1	1	1	1
S4	4	4	4	4
RK	2	2	2	2
TA	2	2	3	3
TA02	2	2	1	1
TA23	3	3	-	-

#### DE-ENERGIZED VALVE


SPOOL	FLOW DIRECTIONS		
	A→T	B→T	P→T
	CURVES ON GRAPHS		
S2	-	-	1
S3	5	5	-
S4	-	-	1

### 5 - OPERATING LIMITS


The curves define the flow rate operating fields according to the valve pressure of the different versions. The values indicated in the graphs are relevant to the standard solenoid valve. The operating limits can be considerably reduced if a 4-way valve is used as 3-way valve with port A or B plugged or without flow.

The values have been obtained according to ISO 6403 norm with solenoids at rated temperature and supplied with voltage equal to 90% of the nominal voltage. The value have been obtained with mineral oil, viscosity 36 cSt, temperature 50 °C and filtration according to ISO 4406:1999 class 18/16/13.

#### 5.1 - Standard operating limits

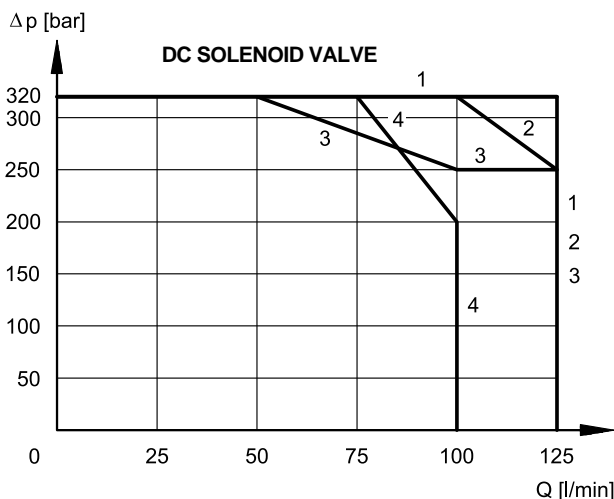



SPOOL	CURVE
S1, S2, RK, TA, TA23	1
S9, TA02	2
S3	3
S4	4

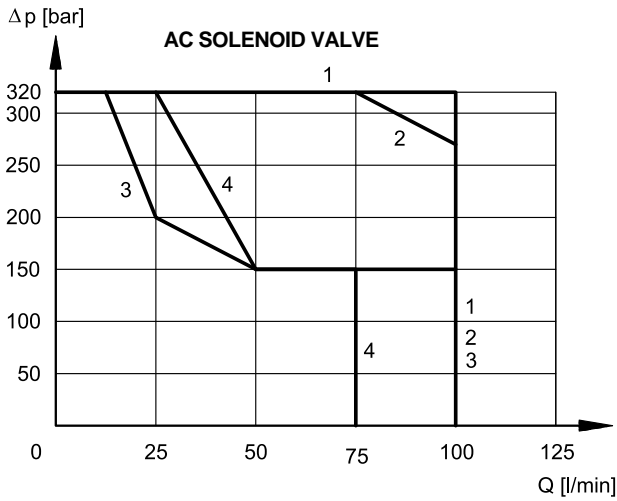

SPOOL	CURVE
S1, RK, TA, TA02, TA23	1
S2	2
S3, S9	3
S4	4

### 5.2 - 4-way valve in 3-way operation

Operating limits of a 4-way valve in 3-way operation or with port A or B plugged or without flow.

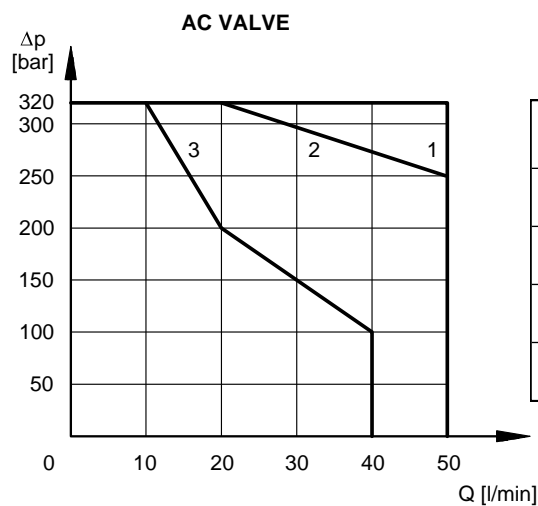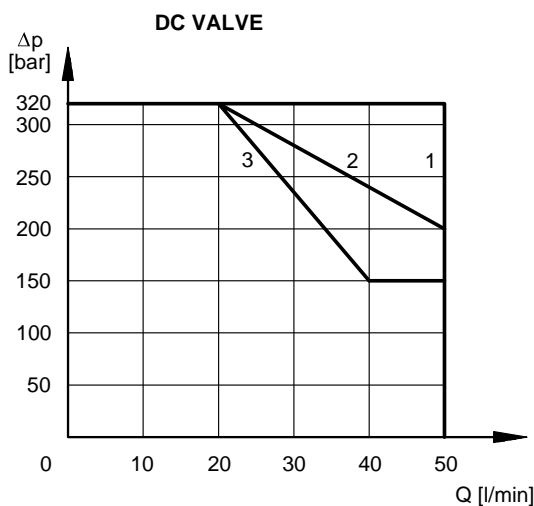

SPOOL	CURVE	
	DC	AC
TA backpr. A TB backpr. B	2	1
TA02 backpr. A TB02 backpr. B	1	1
TA backpr. B TB backpr. A	3	3
TA02 backpr. B TB02 backpr. A	2	2

### 6 - SWITCHING TIMES

The values indicated are obtained with spool S1, according to ISO 6403 standard, with mineral oil viscosity 36 cSt at 50°C.

SUPPLY	TIMES (±10%) [ms]	
	ENERGIZING	DE-ENERGIZING
<b>DC</b>	40 ÷ 90	20 ÷ 50
<b>AC</b>	15 ÷ 30	20 ÷ 50

### 7 - ELECTRICAL FEATURES

#### 7.1 - Solenoids

These are essentially made up of two parts: tube and coil. The tube is threaded into the valve body and includes the armature that moves immersed in oil, without wear. The inner part, in contact with the oil in the return line, ensures heat dissipation. The coil is fastened to the tube by a threaded ring, and can be rotated +/- 90°, to suit the available space.

The interchangeability of coils of different voltages is allowed within the same type of supply current, alternating or direct.

<b>SUPPLY VOLTAGE FLUCTUATION</b>	± 10% Vnom
<b>MAX SWITCH ON FREQUENCY</b>	10.000 ins/hr
<b>DUTY CYCLE</b>	100%
<b>ELECTROMAGNETIC COMPATIBILITY (EMC) - NOTE</b>	In compliance with 2014/30/EU
<b>LOW VOLTAGE</b>	In compliance with 2014/35/EU
<b>CLASS OF PROTECTION</b> Atmospheric agents EN 60529 Coil insulation (VDE 0580) Impregnation:	IP65 (*) class H class H

(\*) The protection degree is guaranteed only with the connector correctly connected and installed

**NOTE:** In order to further reduce the emissions, with DC supply, use of type H connectors is recommended. These prevent voltage peaks on opening of the coil supply electrical circuit (see cat. 49 000).

#### 7.2 - DC valve - Current and power consumption

In direct current energizing, current consumption stays at fairly constant values, essentially determined by Ohm's law:  $V = R \times I$

The table shows current and power consumption values for DC types.

	Resistance at 20°C [Ω] (±5%)	Current consumption [A] (±10%)	Power consumption [W] (±10%)	Coil code K1
<b>C22L5-D12K1</b>	2,9	4,14	50	1903150
<b>C22L5-D24K1</b>	12,3	1,95	47	1903151

#### 7.3 - AC valve - Current and power consumption

In alternating current energizing, an initial phase (maximum movement) is seen, during which the solenoid consumes elevated value currents (inrush current); the current values diminish during the plunger stroke until it reaches the minimum values (holding current) when the plunger reaches the stroke end.

The table shows the values of absorption at the inrush and at holding.

	Freq. [VAC/Hz] (±10%)	Resistance at 20°C [Ω] (±5%)	Current consumption at inrush [A] (±10%)	Current consumption at holding [A] (±5%)	Power consumption at inrush (±10%) [VA]	Power consumption at holding (±10%) [VA]	Coil code K1
<b>C26L5-A24K1</b>	24/50	0,58	15,1	2,84	362,4	68,2	1903160
<b>C26L5-A48K1</b>	48/50	2,34	7,4	1,29	355,2	61,9	1903161
<b>C26L5-A110K1</b>	110/50-120/60	12,3	3,6 - 3,3	0,64 - 0,62	396	70,4 - 74,4	1903162
<b>C26L5-A230K1</b>	230/50-240/60	51,6	1,8 - 1,6	0,31 - 0,28	414 - 384	71,3 - 67,2	1903163


### 8 - ELECTRIC CONNECTORS

Solenoid operated valves are delivered without connectors. Connectors can be ordered separately. See catalogue 49 000.


### 9 - INSTALLATION

The configuration with centring and return springs can be mounted in any position.


Valve fitting takes place by means of screws or tie rods, fixing the valve on a lapped surface, with values of planarity and smoothness that are equal to or better than those indicated in the drawing. If the minimum values of planarity or smoothness are not met, fluid leakages between valve and mounting surface can easily occur.



### 10 - DL5 DC OVERALL AND MOUNTING DIMENSIONS

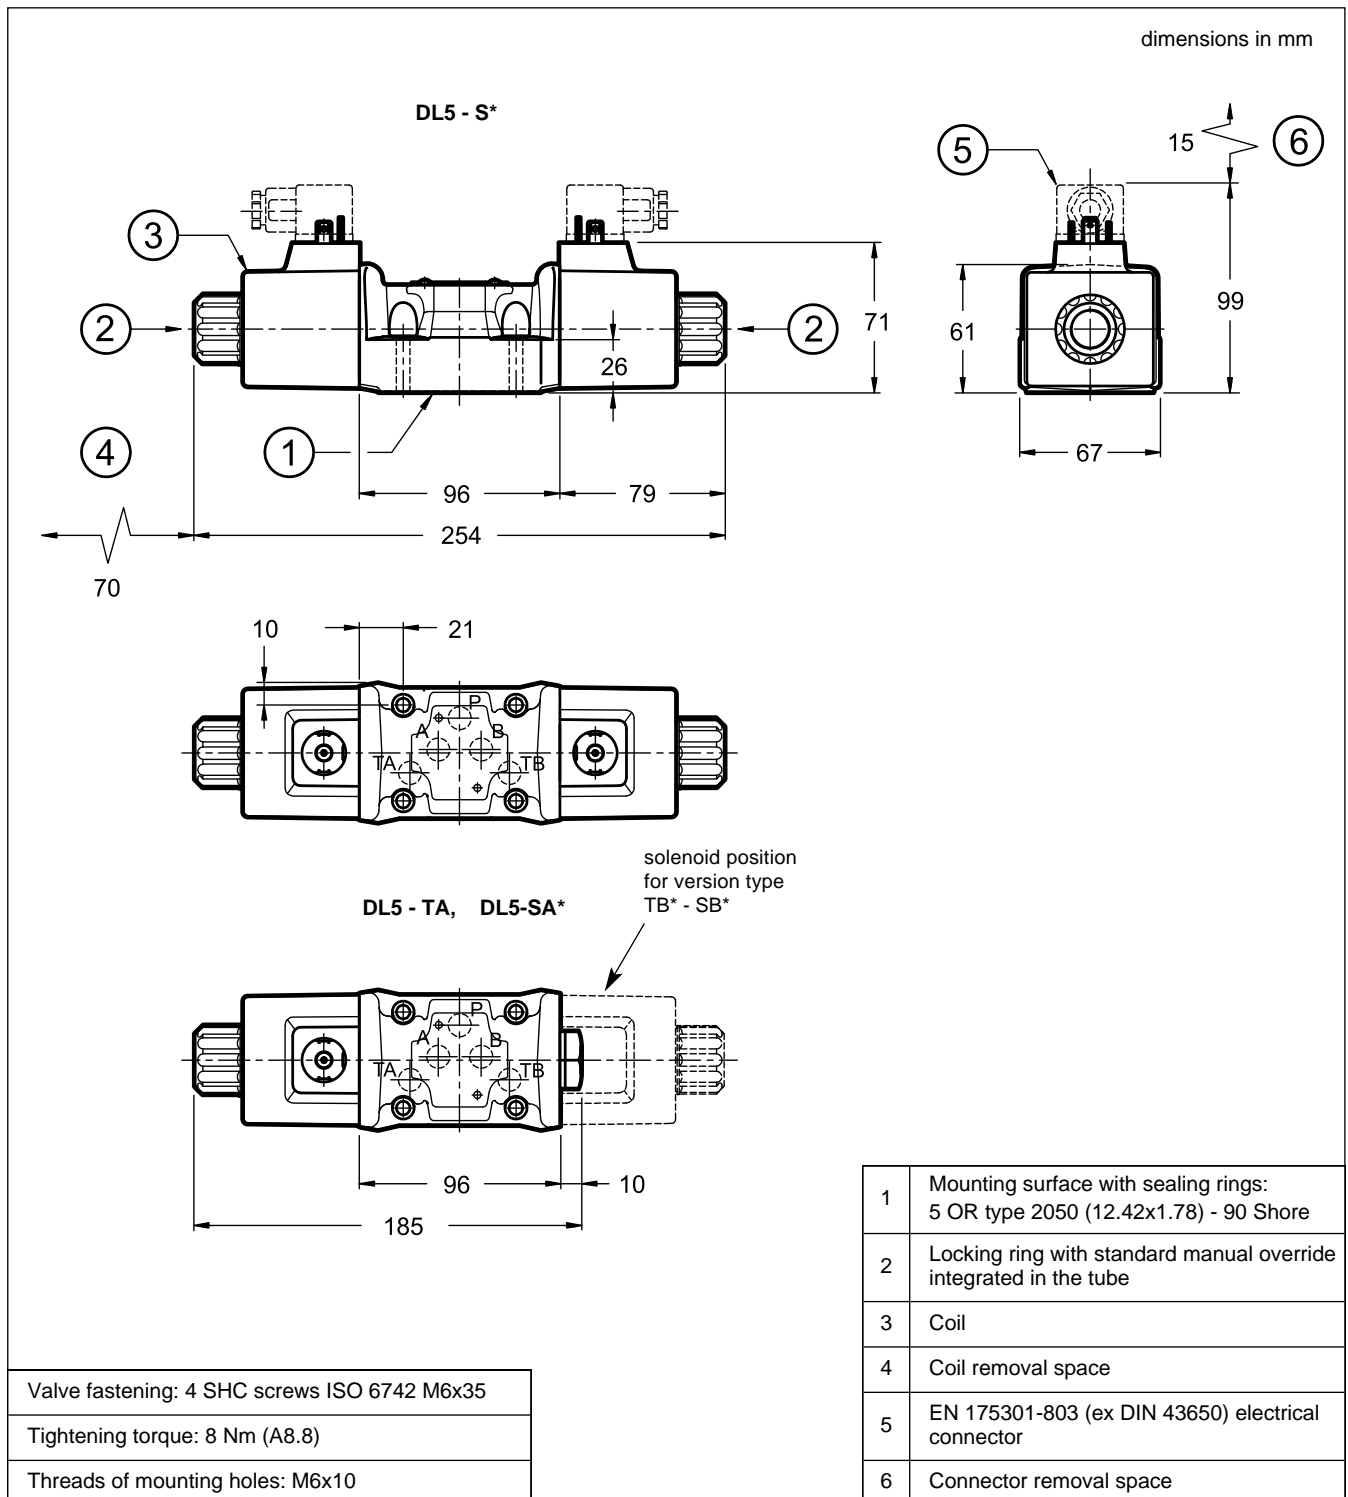


## 11 - DL5 AC OVERALL AND MOUNTING DIMENSIONS

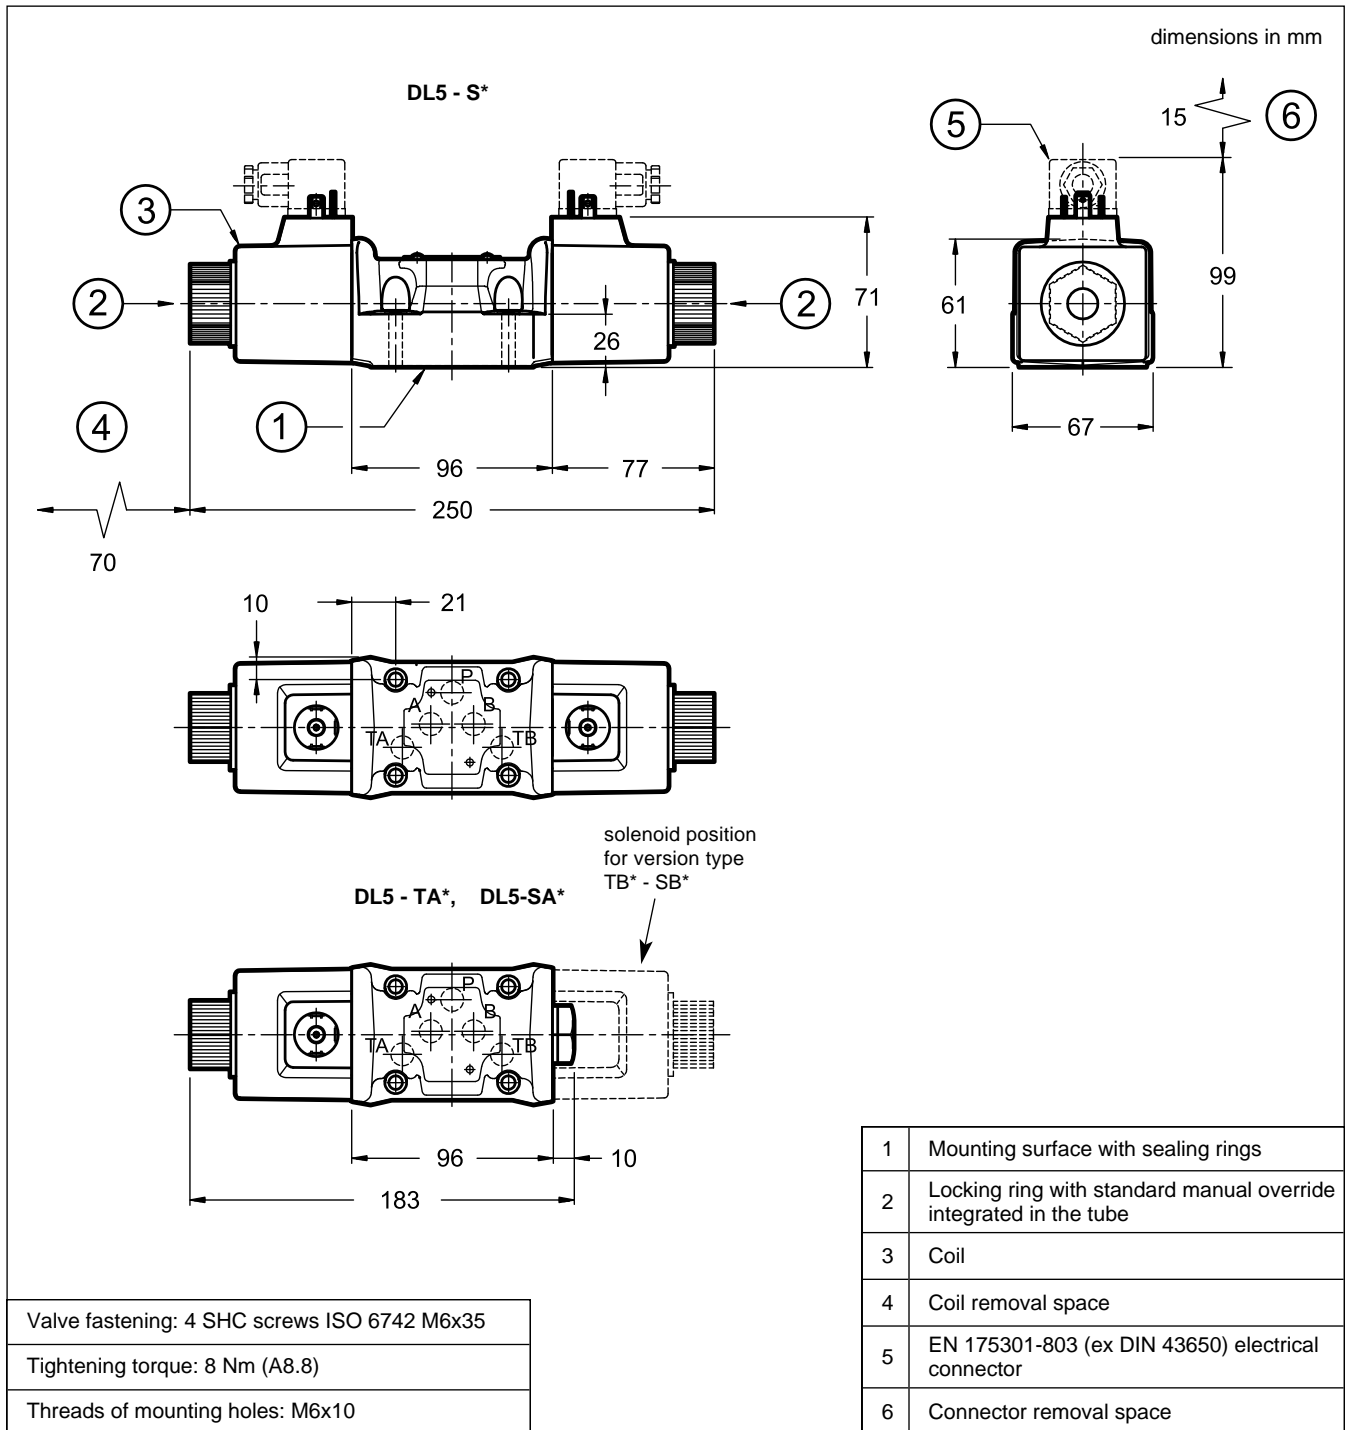

## 12 - MANUAL OVERRIDE


### 12.1 - Boot protected manual override (only for DC solenoid valve)

It can be ordered by entering the code **CM** in the identification code at point 1, or is available as option to be ordered separately: code **3401150006**.





## 13 - SPARE PARTS FOR DC SOLENOID VALVE

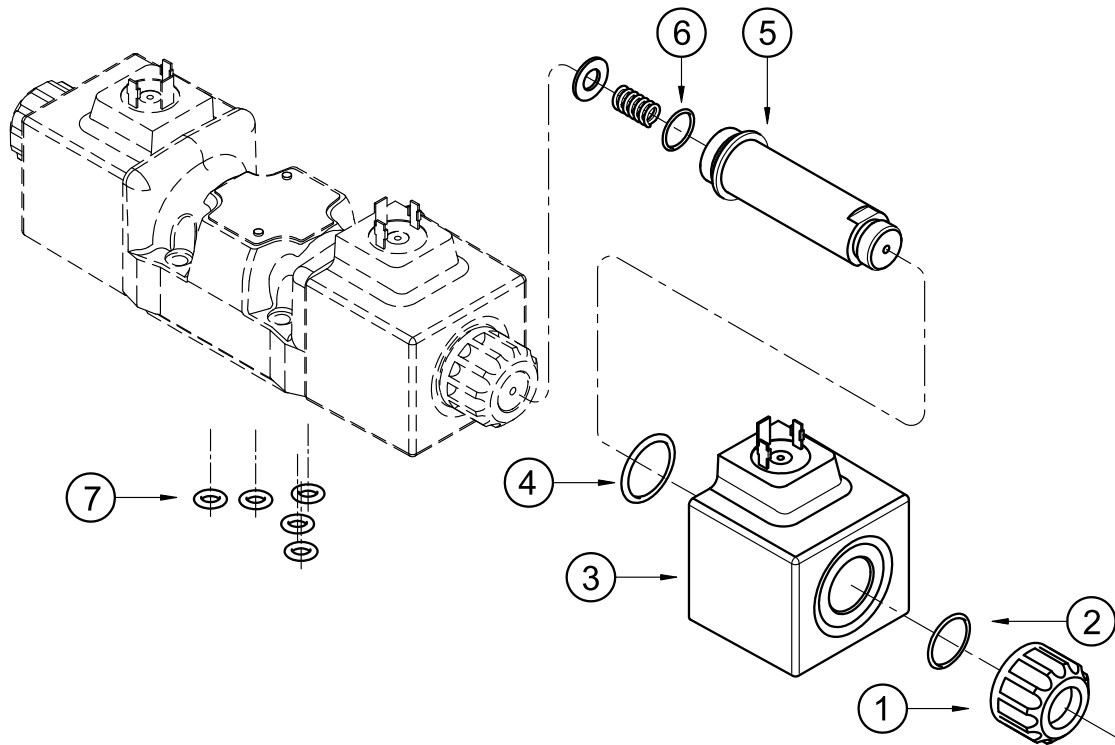

### IDENTIFICATION CODE FOR DC AND RC COILS

**C 22 L5 - K1 / 10**

Supply voltage \_\_\_\_\_

**D12** = 12 V  
**D24** = 24 V

Series no.:  
(the overall and  
mounting dimensions  
remain unchanged  
from 10 to 19)

Coil electrical connection:  
plug for connector type  
EN 175301-803 (ex DIN 43650)


1	Coil locking ring - code 0119412
2	ORM-0220-20 - 70 shore
3	Coil (see identification code)
4	ORM-0296-24 (29.6x2.4) - 70 shore
5	Solenoid tube: TDM22-DL5/10N (NBR seals) TDM22-DL5/10V (FPM seals) (OR n° 6 included)
6	OR type 3.910 (19.18x2.46) - 70 shore
7	N. 5 OR type 2050 (12.42x1.78) - 90 Shore

### SEAL KIT

The codes included the OR n° 2, 4, 6 and 7.

**Cod. 1985447** NBR seals  
**Cod. 1985448** FPM seals

## 14 - SPARE PARTS FOR AC SOLENOID VALVE

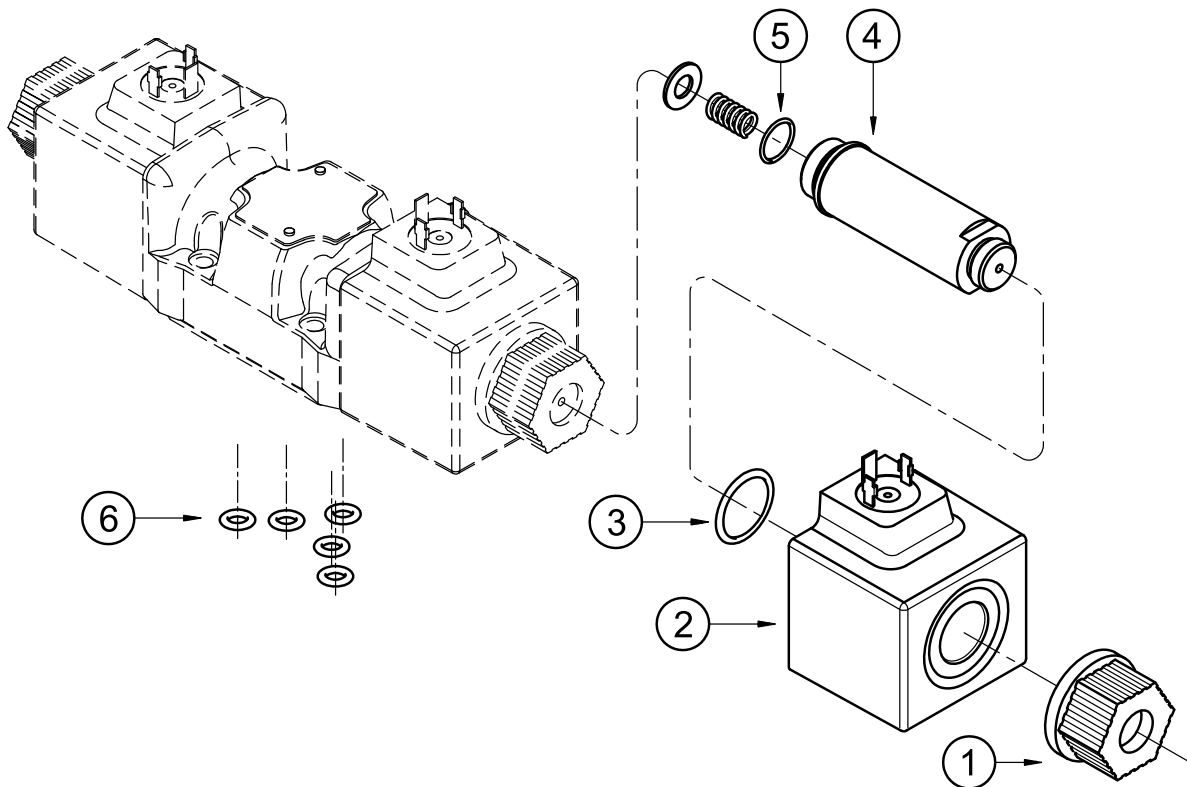

### IDENTIFICATION CODE FOR AC COILS

**C 26 L5 - K1 / 10**

Series no.:  
(the overall and mounting  
dimensions remain  
unchanged from 10 to 19)

Coil electrical connection:  
plug for connector type  
EN 175301-803 (ex DIN 43650)

Supply voltage

**A24** = 24 V - 50 Hz  
**A48** = 48 V - 50 Hz  
**A110** = 110 V - 50 Hz / 120 V - 60 Hz  
**A230** = 230 V - 50 Hz / 240 V - 60 Hz

1	Coil locking ring - code. 0119480
2	Coil (see identification code)
3	ORM-0296-24 (29.6x2.4) - 70 shore
4	Solenoid tube: TA26-DL5/10N (NBR seals) TA26-DL5/10V (FPM seals) (OR n° 5 included)
5	OR type 3.910 (19.18x2.46) - 70 shore
6	N. 5 OR type 2050 (12.42x1.78) - 90 Shore

### SEAL KIT

The codes included the OR n° 3, 5 and 6.

**Cod. 1985449** NBR seals  
**Cod. 1985450** FPM seals

## 15 - SUBPLATES

(see catalogue 51 000)

Type PMD4-AI4G with rear ports - port threading: 3/4" BSP

Type PMD4-AL4G with side ports - port threading: 1/2" BSP