


## 带装配工具的滚珠轴承保持架, 黄铜



206.73.

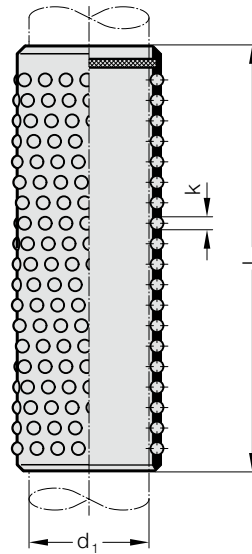

材料:

笼: 黄铜

球体: 钢, 硬化处理根据 DIN 5401

说明:

滚珠轴承保持架带有装配工具, 在安装时无需他人的帮助即可插接到正确的位置。骨架在安装区域中装备有制动环衬垫。优点主要在有多柱的导柱模架得到发挥。

☞ 滚珠导向类型见D章开头。

☞ 轴承寿命和动态负荷指数见D章节的末尾部分。

l = 订购额定长度

l<sub>1</sub> = 生产长度

### 206.73. 带装配工具的滚珠轴承保持架, 黄铜

d <sub>1</sub>	10 11 12	15	16	19	20	24 25	30 32	38 40	48 50	60 63	80
k	2	3	3	3	3	3	4	4	4	4	6
l/l <sub>1</sub>	总滚珠数量										
24 / 24	80										
28 / 28	100										
31 / 32	120										
40 / 39	176										
40 / 40	160										
45 / 44	144										
45 / 45	144										
50 / 50	180										
56 / 55	180										
56 / 56	180										
56 / 57	192										
63 / 64	192										
63 / 65	224										
71 / 70	224										
71 / 72	256										
80 / 80	256										
95 / 95	320										
95 / 96	320										
105 / 105	320										
120 / 119	360										
120 / 120	360										
140 / 140	360										
160 / 160	280										
160 / 161	336										
180 / 180	392										
180 / 182	340										
200 / 200	408										
200 / 203	476										
240 / 238	544										
240 / 240	440										
	440										
	440										
	380										
	456										
	532										
	608										
	560										
	440										
	528										
	616										
	704										
	520										
	624										
	728										
	832										
	600										
	720										
	840										
	960										
	816										
	952										
	1088										
	912										
	1064										
	1216										
	1104										
	1288										
	1472										

### 订购示例:

带装配工具的滚珠轴承保持架, 黄铜 = 206.73.  
 导向装置直径 d<sub>1</sub> 38 mm = 038.  
 滚珠轴承保持架的订购额定长度 l 50 mm = 050  
 订购编号 = 206.73. 038. 050