





★ 产品特点：胶体材料采用进口材料，具有良好的耐磨性、腐蚀性、耐油性和电气绝缘性。



CAD  
2D/3D

①代号	主体M材质	弹性体M材质	S表面处理
CPHAJ	高强度铝合金	PA66	阳极氧化处理

▲ 外径44以上弹性体颜色为黑色。

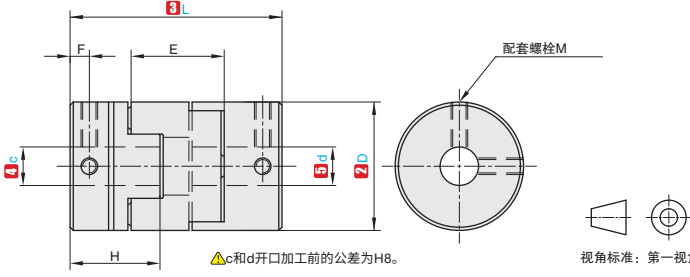



订购编号示例 标准键槽追加

①代号 - ②D - ③L - ④c - ⑤d - (CK) - (DK)  
 CPHAJ - 20 - 25 - c5 - d6  
 CPHAJ - 20 - 25 - c5 - d6 - CK - DK



①代号	②D	③L	④c⑤d 可选范围		E	F	H	M	紧固螺 丝扭矩 (N·m)
CPHAJ	16	18	4 5 6 6.35 7 8		12	3.0	7.1	M3	1.2
	20	25	5 6 6.35 7 8 9 9.525 10		12.7	3.0	10.1	M4	2.5
	25	28	5 6 6.35 8 9 9.525 10 11 12		17.7	2.8	21	M4	2.5
	32	33	5 6 8 9 9.525 10 11 12 12.7 14 15 16		20	3.4	14	M4	2.5
	40	32	8 9 9.525 10 11 12 12.7 14 15 16 17 18 19 20		20.3	3.2	14	M4	2.5
	44	46	8 9 9.525 10 11 12 12.7 14 15 16 17 18 19 20 22		18.4	3.5	20.7	M5	5
	50	38	10 12 12.7 14 15 16 17 18 19 20 22 24 25		22.35	3.8	16.5	M5	5
	55	57	10 12 12.7 14 15 16 17 18 19 20 22 24 25 28		25.8	7.8	26.2	M5	5
	63	47	14 15 16 17 18 19 20 22 24 25 28 30 32		25.8	6.0	21	M6	8
70	77	16 17 18 19 20 22 24 25 28 30 32 35		25	13.5	36.5	M8	20	

①代号	②D	③L	额定扭矩 (N·m)	容许偏心 (mm)	容许偏角 (°)	容许轴向偏差 (mm)	容许转速 (rpm)	静态逆转刚度 (N·m/rad)	惯性矩 (kg·m <sup>2</sup> )	重量 (g)
CPHAJ	16	18	0.7	1	3	±0.2	9000	30	3.2×10 <sup>-7</sup>	6
	20	25	1.2	1.5	3	±0.2	7000	58	1.0×10 <sup>-6</sup>	18
	25	28	2	2	3	±0.2	6000	130	3.0×10 <sup>-6</sup>	25
	32	33	10	2.5	3	±0.2	4800	270	9.5×10 <sup>-6</sup>	44
	40	32	12	2.8	3	±0.2	3600	520	2.3×10 <sup>-5</sup>	81
	44	46	14	2.9	3	±0.2	3500	560	3.8×10 <sup>-5</sup>	136
	50	38	19	3	3	±0.2	3000	800	6.0×10 <sup>-5</sup>	142
	55	57	26	3.3	3	±0.2	2800	795	9.9×10 <sup>-5</sup>	255
63	47	33	3.5	3	±0.2	2500	1200	2.1×10 <sup>-4</sup>	320	
70	77	45	3.8	3	±0.2	2500	1260	3.9×10 <sup>-4</sup>	445	

▲以上参数由最大孔径测得。

键槽尺寸公差表(JS9)

轴孔直径 c-d	b		t		键公称尺寸 b×h
	基准尺寸	容差	基准尺寸	容差	
6~7.9	2	±0.0125	1.0	+0.1 0	2×2
8~10	3		1.4		3×3
10.1~12	4	1.8	4×4		
12.1~17	5	±0.0150	2.3	+0.2 0	5×5
17.1~22	6		2.8		6×6
22.1~24	8	±0.0180	3.3		8×7

可选加工 代码	c孔键槽加工 CK	d孔键槽加工 DK
技术 说明		

▲键槽加工仅适用≥6的孔径。  
 ▲键槽尺寸请参考键槽尺寸公差表。  
 ▲非标准键槽请联系销售工程师。

D1  
联轴器



交货期

**7天发货**

数量分类	标准订单	特殊订单
	小单	大单
数量	1-20	21以上
交货期	7工作日	现询

▲遇到特殊期间，货期会有变更，详情见官网通知。

相关产品推荐

		
滚珠丝杠 详情见官网	平键 ▶ P2134-2137	单轴驱动器 详情见官网

