



# CONCERTINA SHROUD WITH SPACER TUBE



206.92.

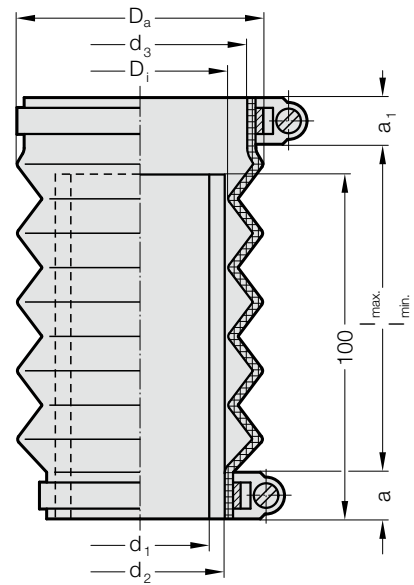

## Mounting example



## Note:

Concertina Shrouds are supplied complete with spacer tube and two hose clamps.  
Special sizes on request.

## 206.92. Concertina shroud with spacer tube

for guide bushes	2051.	2061.	2051.	2061.	2051.	2061.	2051.	2061.	2051.	2061.	2051.	2061.	2081.	2081.	2081.	2081.	2081.	2081.	2081.					
Pillar- $\varnothing$ $d_1$	19	20	24	25	30	32	38	40	48	50	60	63	19	20	24	25	30	32	38	40	48	50	60	63
$d^*$	20	25	32	38	40	50	60	63	76	76	76	76	39	45	54	63	74	94	94	94	94	94	94	94
$d_2$	25	30	40	50	60	70	70	70	70	70	70	70	25	30	40	50	60	70	70	70	70	70	70	70
$d_3$	32	38	46	55	64	76	76	76	76	76	76	76	39	45	54	63	74	94	94	94	94	94	94	94
$d_4^{**}$	32	38	48	58	68	79	79	79	79	79	79	79	40	45	54	66	80	95	95	95	95	95	95	95
$D_1$	30	30	46	55	62	75	75	75	75	75	75	75	32	32	45	52	62	75	75	75	75	75	75	75
$D_a$	51	56	72	87	86	100	100	100	100	100	100	100	54	56	63	96	84	104	104	104	104	104	104	104
$a$	13	13	20	12	12	12	12	12	12	12	12	12	10	10	10	12	12	10	10	10	10	10	10	10
$a_1$	16	13	20	12	12	10	10	10	10	10	10	10	10	10	10	12	12	10	10	10	10	10	10	10
$l_1$	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
$l_{min}$	30	25	20	44	25	30	30	37	35	35	25	45	35	35	25	45	35	35	35	35	35	35	35	35
$l_{max}$	170	130	100	119	110	130	130	145	110	110	225	165	185	185	185	185	185	185	185	185	185	185	185	185

\* $d$  = Nominal diameter, \*\* $d_4$  = Nominal ordering diameter for flange diameter

## Ordering Code (example):

Concertina shroud with spacer tube	=	206.92.
Nominal diameter $d$	20 mm =	020.
Nominal order diameter for flange connection diameter $d_4$	40 mm =	040
Order No	=	206.92. 020. 040